

QDB-10-40000-KKF

10MHz~40GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

Frequency Range:	0.01~40GHz
Insertion Loss:	0.5dB max.
VSWR:	1.3 max.
Impedance:	50Ω
Voltage:	63V max.


Mechanical

Connectors:	2.92mm
Outer Conductors:	Passivated stainless steel
Dielectric:	PEI
Male Inner Conductor:	Gold plated brass (1.27um)
Female Inner Conductor:	Gold plated beryllium copper (1.27um)

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings

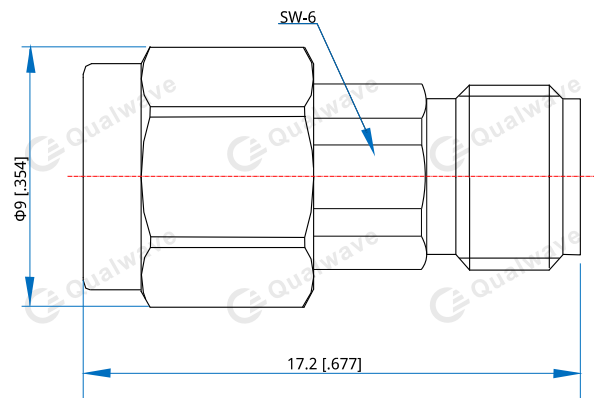

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QDB-10-40000-KKF

Customization is available upon request.