


QDB-9K-8000

9KHz~8GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar



Electrical

Frequency Range: 9K~8GHz
 Insertion Loss: 0.35dB max.
 VSWR: 1.25 max.
 Impedance: 50Ω
 Voltage: 75V max.

Mechanical

Size*1: 18*14*10mm(Outline A, B)
 0.709*0.551*0.394in(Outline A, B)
 18*20*20mm(Outline C, D)
 0.709*0.787*0.787in(Outline C, D)

Connectors: SMA, N
 Mounting: 2-Φ1.6 through hole(Outline A, B)
 2-Φ3.2 through hole(Outline C, D)

[1] Exclude connectors.

Environmental


Operation Temperature: -35~+75°C
 Storage temperature: -45~+85°C

How To Order

- QDB-9K-8000-SFSF - Outline A
- QDB-9K-8000-SSF - Outline B
- QDB-9K-8000-NFNF - Outline C
- QDB-9K-8000-NNF - Outline D

Customization is available upon request.

Outline Drawings

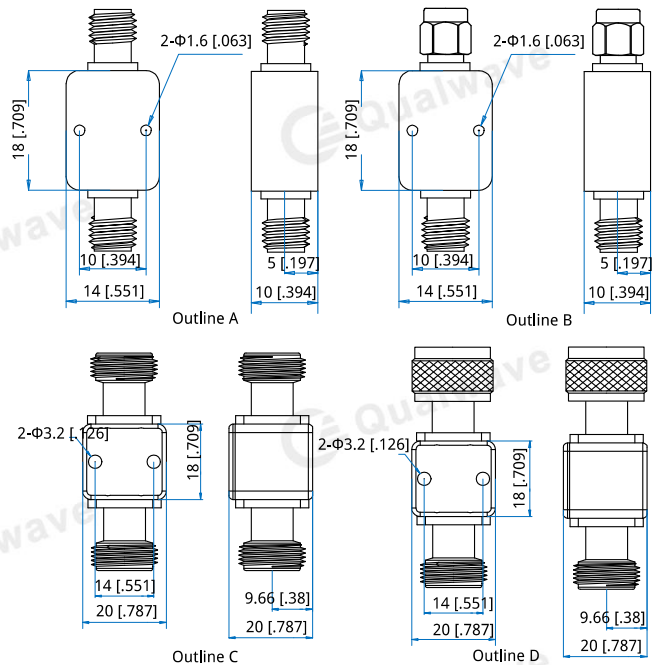

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

Typical Performance Curves

