

QDA-2000-18000-60-0.1

2~18GHz, 60dB, 0.1dB

Features:

- * Broadband
- * High Dynamic Range

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~18GHz
Insertion Loss:	6dB typ.
Attenuation Range:	0~60dB
Step:	0.1dB
Control Bit:	10 Bits
Attenuation Accuracy:	±5% typ of attenuation setting
VSWR:	2 max.
Voltage:	±5V DC
Input Power:	+20dBm max.
Impedance:	50Ω
Control:	TTL High: On TTL Low/NC: Off

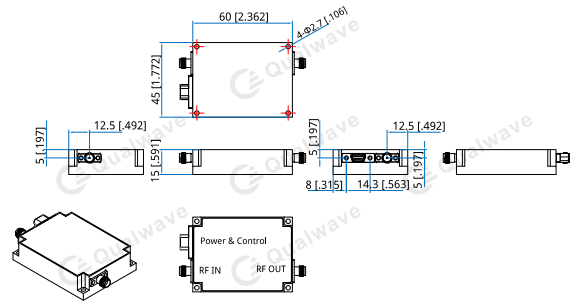
Mechanical

Size ^{*1} :	60*45*15mm 2.362*1.772*0.591in
RF Connectors:	SMA Female
Mounting:	4-Φ2.7mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+70°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDA-2000-18000-60-0.1

Customization is available upon request.