

QDO-16000-13

16GHz, 13dBm

Features:

- * High Frequency Stability
- * Ultra Low Phase Noise

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Frequency:	16GHz
Frequency Temperature Stability:	±5ppm/°C max.
Output Power:	13dBm min.
Phase Noise:	-85dBc/Hz@10KHz max.
Harmonic:	-20dBc max.
Spurious:	-80dBc max.
Voltage:	+12V
Current:	220mA max.

Mechanical


Size ^{*1} :	54*40*18.5mm 2.126*1.575*0.728in
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	4-M2.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+75°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

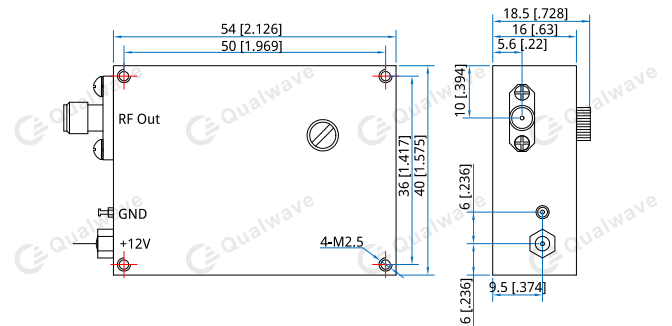

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QDO-16000-13

Customization is available upon request.