

QDO-7600-13

7.6GHz, 13dBm

Features:

- * High Frequency Stability
- * Ultra Low Phase Noise

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Frequency:	7.6GHz
Frequency Temperature Stability:	5ppm max.
Output Power:	13dBm min.
Phase Noise:	-105dBc/Hz@10KHz max.
Harmonic:	-20dBc max.
Spurious:	-80dBc max.
Voltage:	+12V
Current:	100mA max.

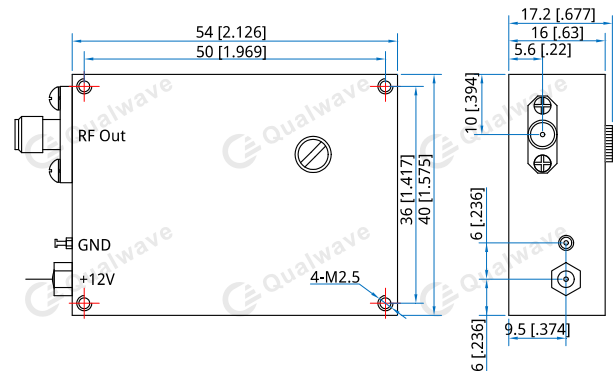
Mechanical

Size ^{*1} :	54*40*17.2mm 2.126*1.575*0.677in
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	4-Φ2.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+75°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDO-7600-13

Customization is available upon request.