

## QDDC-0.009-500-K2-40-NS

9KHz~0.5GHz, 200W, 40dB

### Features:

\* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	9KHz~0.5GHz
Coupling:	40±1dB
Coupling Flatness:	±0.5dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.5dB max.
Directivity:	20dB min.
Power Handling:	200W

### Mechanical

Size <sup>*1</sup> :	152.4*55.9*55.9mm 6*2.201*2.201in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M3-6H-D8mm through-hole

[1] Exclude connectors

### Outline Drawings

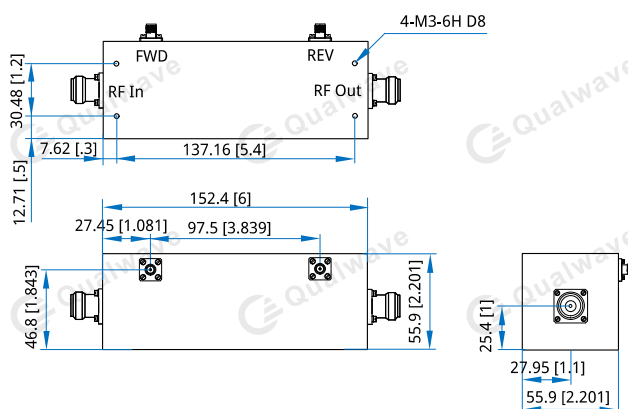

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**QDDC-0.009-500-K2-40-NS**

Customization is available upon request.