

## QDDC-0.03-30-5K25-50-NS

0.03~30MHz, 5250W, 50dB

### Features:

\* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	0.03~30MHz
Coupling:	50±1dB
Coupling Flatness:	±0.5dB max.
VSWR(Mainline):	1.1 max.
Insertion Loss:	0.05dB max.
Directivity:	20dB min.
Average Power:	5250W CW

### Mechanical


Size <sup>*1</sup> :	127*76.2*56.9mm 5*3*2.24in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M3mm Deep 8

[1] Exclude connectors

### Environmental

Operating Temperature:	-55~+75°C
------------------------	-----------

### Outline Drawings

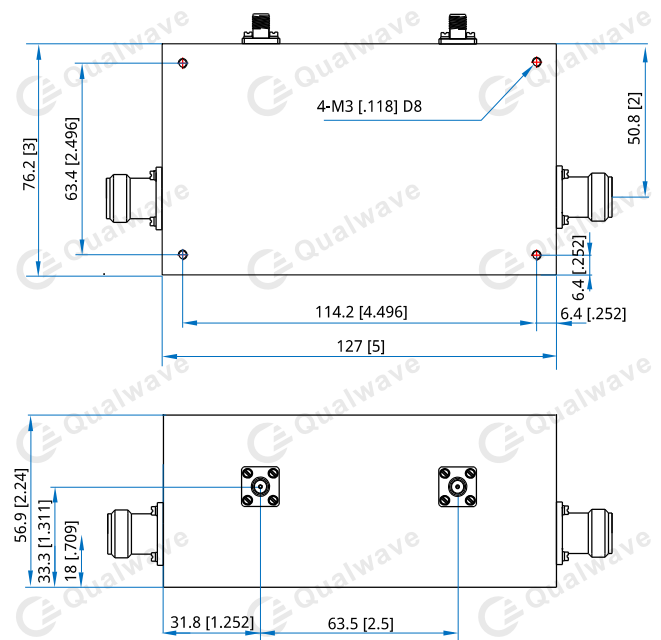

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QDDC-0.03-30-5K25-50-NS**

Customization is available upon request.