

QDDC-0.8-30-K5-40-NS

0.8~30MHz, 500W, 40dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.8~30MHz
Insertion Loss:	0.1dB max.
Flatness:	±0.5dB max.
Coupling:	40±1dB
Directivity:	30dB min.
VSWR:	1.15 max.
Average Power:	500W

Mechanical


Size*1:	120*55.9*30mm 4.724*2.201*1.181in
RF Connectors:	N Female
Coupling Connectors:	SMA female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

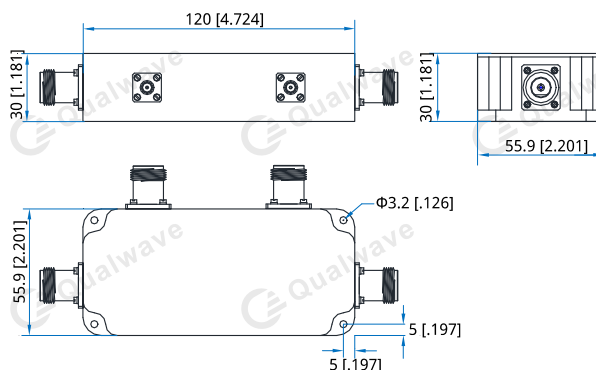

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-0.8-30-K5-40-NS

Customization is available upon request.