

QDDC-1-50-3K-58-NS

1~50MHz, 3000W, 58dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	1~50MHz
Coupling:	58±5dB@30~50MHz 58±2dB@3~30MHz 64±2dB@1MHz
VSWR:	1.1 max.
Insertion Loss:	0.1dB max.
Directivity:	25dB min.@1~30MHz 20dB min.@1~50MHz
Average Power:	3000W CW

Mechanical


Size ^{*1} :	60*36*25mm 2.236*1.417*0.984in
RF Connectors:	N female, SMA female
Mounting:	4-M3-D10mm

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

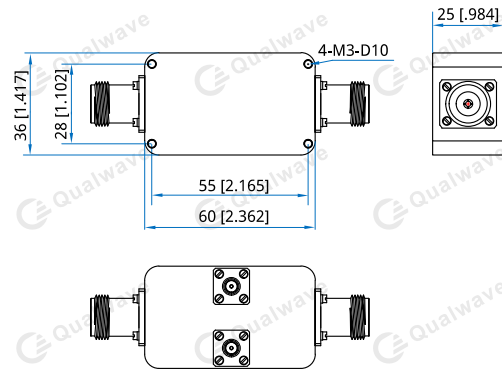

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-1-50-3K-58-NS

Customization is available upon request.