

QDDC-10-170-5K-60-S7

10~170MHz, 5000W, 60dB

Features:
* Low Insertion Loss

Applications:
* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	10~170MHz
Coupling:	60±1.5dB
Coupling Flatness:	±0.5dB max.
VSWR:	1.2 max.
Insertion Loss:	0.2dB max.
Directivity:	16dB min.
Average Power:	5000W CW

Mechanical


Size ^{*1} :	152.4*55.9*55.9mm 6*2.201*2.201in
RF Connectors:	SMA female
Coupling Connectors:	L29 female
Mounting:	4-M3mm-H6 D8

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

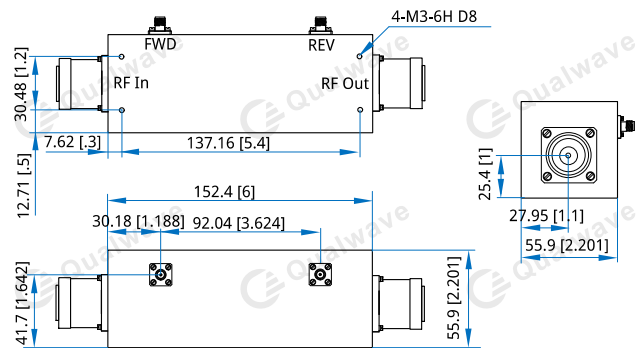

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-10-170-5K-60-S7

Customization is available upon request.