

QDDC-2000-18000-20-40-S

2~18GHz, 20W, 40dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

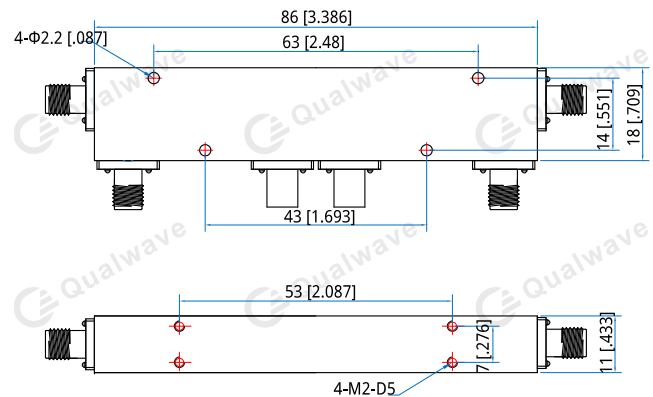
Electrical

Frequency:	2~18GHz
Insertion Loss:	2dB max.
Coupling:	40±1.5dB
Directivity:	7dB min.
VSWR:	1.7 max.
Average Power:	20W
Impedance:	50Ω

Mechanical

Size ^{*1} :	86*18*11mm 3.386*0.709*0.433in
Main Line Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole 4-M2, depth 5mm

[1] Exclude connectors and termination

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-2000-18000-20-40-S

Customization is available upon request.