

QDDC-2000-2800-K3-40-NS

2~2.8GHz, 300W, 40dB

Features:
* Low Insertion Loss

Applications:
* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	2~2.8GHz
Coupling:	40±1dB max.
Coupling Flatness:	±1dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.25dB max.
Directivity:	20dB min.
Average Power:	300W CW

Mechanical


Size ^{*1} :	53*55*22mm 2.087*2.165*0.866in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

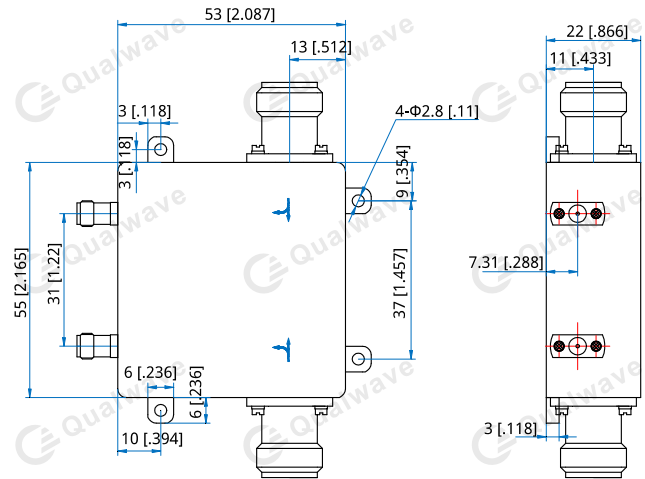

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-2000-2800-K3-40-NS

Customization is available upon request.