

QDDC-2600-3950-K4-10-NS

2.6~3.95GHz, 400W, 10dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2.6~3.95GHz
Coupling:	10±0.5dB
Coupling Flatness:	0.5dB
VSWR (Mainline):	1.2 max.
Insertion Loss:	0.25dB max.
Directivity:	20dB min.
Power Handling:	400W
Peak Power:	4000W

Mechanical


Size ^{*1} :	55*25*25mm 2.165*0.984*0.984in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	3-Φ2.8mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+125°C
------------------------	------------

Outline Drawings

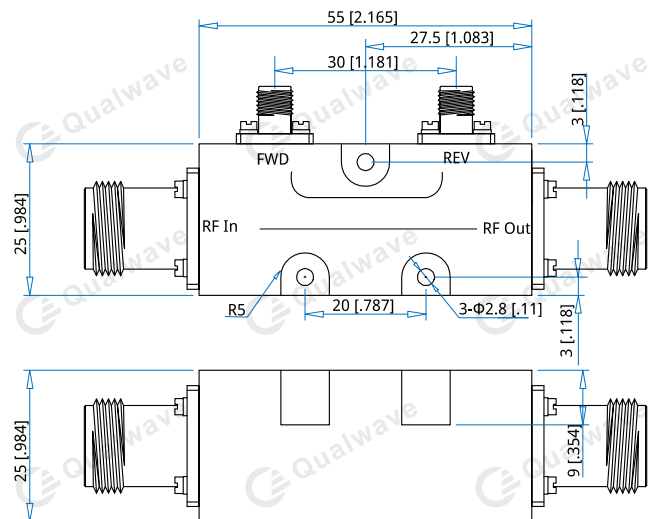

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-2600-3950-K4-10-NS

Customization is available upon request.