

QDDC-4000-5000-K2-10-NS

4~5GHz, 200W, 10dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	4~5GHz
Coupling:	10±0.5dB
VSWR (Mainline):	1.2 max.
Insertion Loss:	0.5dB max.
Directivity:	20dB min.
Average Power:	200W
Peak Power:	2000W

Mechanical


Size*1:	55*25*25mm 2.165*0.984*0.984in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	3-Φ2.8mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

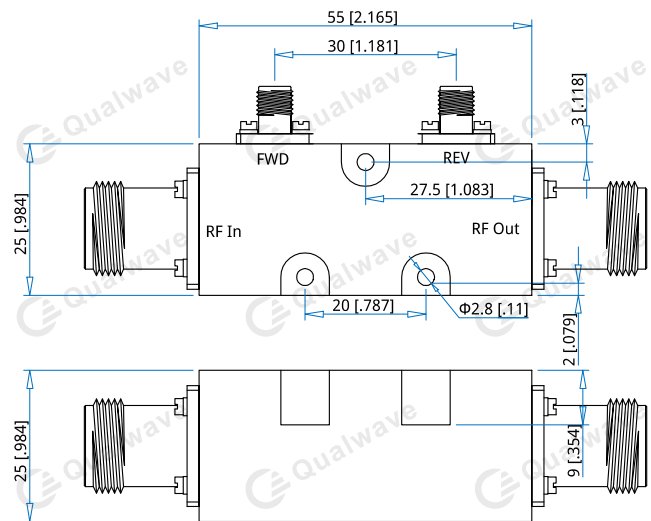

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-4000-5000-K2-10-NS

Customization is available upon request.