

## QDDC-4000-6000-60-30-S

4~6GHz, 60W, 30dB

### Features:

\* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	4~6GHz
Coupling:	30±1.5dB
VSWR (Mainline):	1.25 max.
Insertion Loss:	0.4dB max.
Directivity:	15dB min.
Power Handling:	60W

### Mechanical


Size <sup>*1</sup> :	55*25*25mm 2.165*0.984*0.984in
RF Connectors:	SMA female
Coupling Connectors:	SMA female
Mounting:	3-Φ2.8mm through-hole

[1] Exclude connectors

### Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

### Outline Drawings

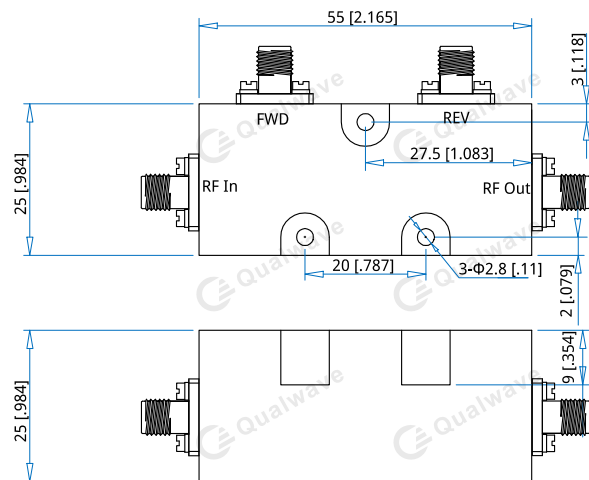

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**QDDC-4000-6000-60-30-S**

Customization is available upon request.