

QDDC-500-2000-K8-50-NS

0.5~2GHz, 800W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~2GHz
Coupling:	50±0.8dB max.
VSWR (Mainline):	1.35 max.
Insertion Loss:	0.3dB max.
Directivity:	18dB min.
Average Power:	800W CW max.

Mechanical


Size*1:	85*44*26mm 3.346*1.732*1.024in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-Φ5mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

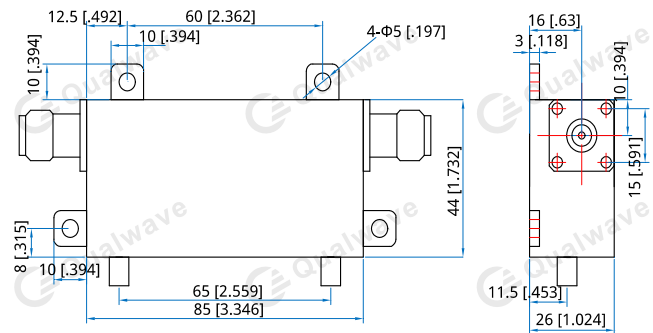

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-500-2000-K8-50-NS

Customization is available upon request.