

QDDC-5000-6000-K1-10-NS

5~6GHz, 100W, 10dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	5~6GHz
Coupling:	10±0.5dB
Coupling Flatness:	0.5dB
VSWR (Mainline):	1.2 max.
Insertion Loss:	0.5dB max.
Directivity:	20dB min.
Power Handling:	100W
Peak Power:	1000W

Mechanical


Size ^{*1} :	50.8*50.8*22.35mm 2*2*0.88in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+125°C
------------------------	------------

Outline Drawings

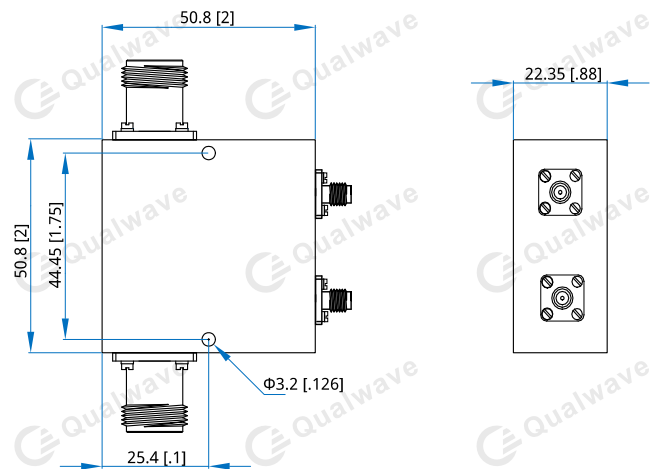

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-5000-6000-K1-10-NS

Customization is available upon request.