

QDDC-700-2500-1K5-50-7S

0.7~2.5GHz, 1500W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.7~2.5GHz
Insertion Loss:	0.2dB max.
Coupling:	50±1.5dB
Directivity:	12dB min.
VSWR (Mainline):	1.35 max.
Average Power:	1500W

Mechanical


Size*1:	57*51.5*45mm 2.244*2.028*1.772in
RF Connectors:	7/16 DIN (L29) female
Coupling Connectors:	SMA female
Mounting:	2-Φ3.8mm through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+125°C
------------------------	------------

Outline Drawings

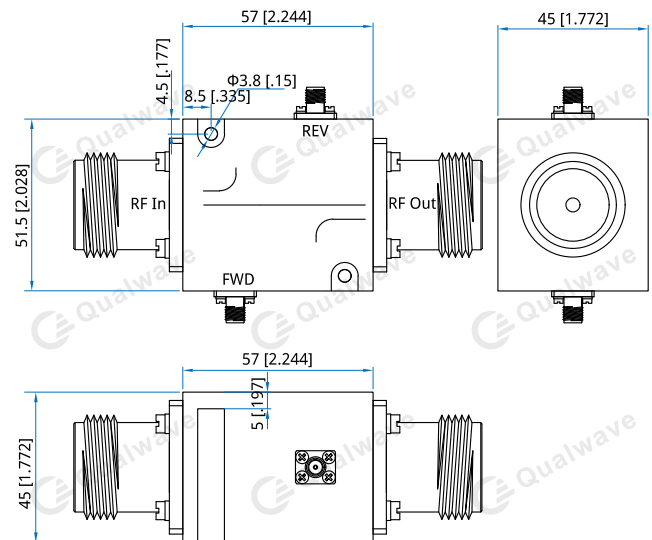

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-700-2500-1K5-50-7S

Customization is available upon request.