

QDDC-80-1000-K2-40-N

0.08~1GHz, 200W, 40dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.08~1GHz
Insertion Loss:	0.3dB max.
Coupling:	40±1.5dB
Directivity:	20dB min.
Coupling Flatness:	±1dB
VSWR (Mainline):	1.2 max.
VSWR (Coupling):	1.5 max.
Average Power:	200W
Impedance	50Ω

Mechanical


Size ^{*1} :	45.771*42.36*20mm 1.802*1.668*0.787in
Connectors:	N Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

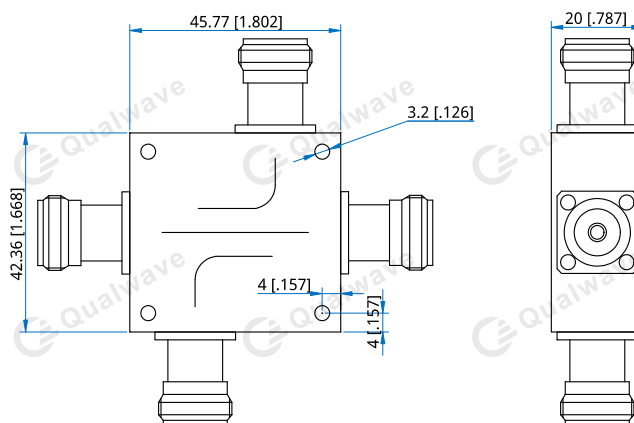

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QDDC-80-1000-K2-40-N

Customization is available upon request.