

QE-2000-18000-S-7.5

2~18GHz, 7.5dB

Features:
 * Low VSWR
 * Small Size

Applications:
 * Amplifier
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	2~18GHz
Insertion Loss:	2.2dB max.
VSWR:	1.8 max.
Slope:	7.5dB
Attenuation:	9.7dB @2GHz 2.2dB @18GHz
Linearity:	±1dB
Power Handling:	23dBm max.
Impedance:	50Ω

Mechanical

Size ^{*1} :	30*20*12mm 1.181*0.787*0.472in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole


[1] Exclude connectors.

Environmental

Temperature:	-45~+75°C
--------------	-----------

Outline Drawings

(The appearance is universal, and there may be slight variations in the appearance of this model.)

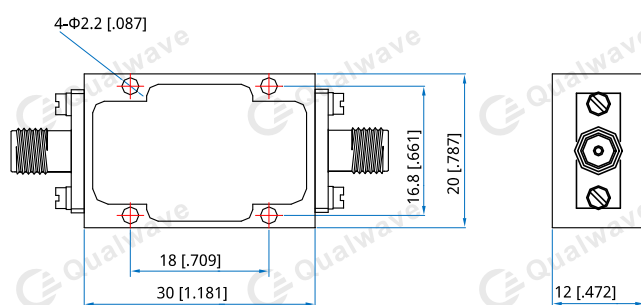

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QE-2000-18000-S-7.5

Customization is available upon request.