

# QFA1850

## DC~18GHz, 50W

**Features:**

- \* Low VSWR
- \* High Attenuation Flatness

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar


**Electrical**

Frequency:	DC~18GHz
Attenuation:	1~50dB
Impedance:	50Ω
Average Power*1:	50W@25°C max.

[1] Derated linearly to 2.5W@120°C.

**Mechanical**

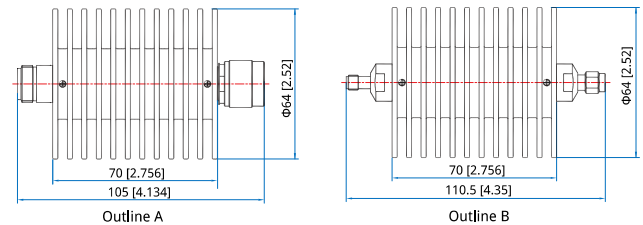
Size*2:	Φ64*105mm Φ2.52*4.134in
Size*3:	Φ64*110.5mm Φ2.52*4.35in
RF Connectors*2:	N Male, N Female
RF Connectors*3:	SMA Male, SMA Female

[2] N connectors.

[3] SMA connectors.

**Environmental**

Temperature: -55~+125°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±2mm [±0.08in]

**Attenuation Accuracy and VSWR**

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)				VSWR (max.)
	1~10	11~20	21~30	31~50	
DC~4	0.4	0.5	0.7	0.7	1.2
DC~8	0.5	0.6	0.8	0.8	1.25
DC~12.4	0.6	0.7	0.8	1.1	1.35
DC~18	0.8	0.9	1.1	1.3	1.45

**How To Order**
**QFA1850-X-Y-Z**

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Connector naming rules:

N - N (Outline A)

S - SMA (Outline B)

Examples:

To order an attenuator, DC-12.4GHz, N male to N female, 3dB attenuation, specify QFA1850-12.4-3-N.