

QHF-380-1000-30

0.38~1GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	0.38~1GHz
Insertion Loss:	2.5dB max. @0.38~0.4GHz 1dB max. @0.4~1GHz
Passband Ripple:	2.5dB max. @0.38~0.4GHz 1dB max. @0.4~1GHz
VSWR:	1.7 max.
Stopband Attenuation:	30dB @DC~0.35GHz
Average Power:	1W max.
Impedance:	50Ω

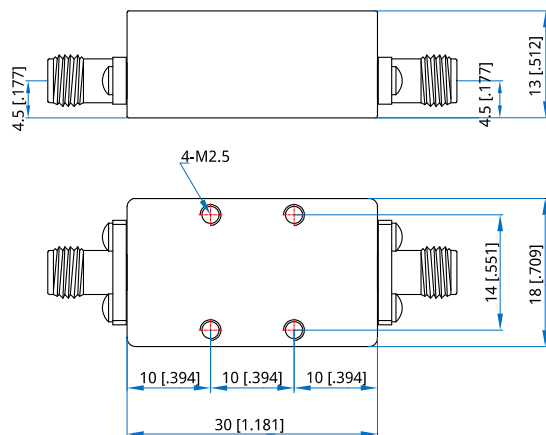
Mechanical

Size*1:	30*18*13mm 1.181*0.709*0.512in
Connectors:	SMA Female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QHF-380-1000-30

Customization is available upon request.