

QWT284-3K

WR-284, 3KW

Features:

- * Low VSWR
- * Broadband

Applications:

- * Transmitters
- * Antennas
- * Laboratory Test
- * Impedance Matching

Electrical

Frequency:	2.7~3.5GHz
Average Power:	3KW
Peak Power:	20KW
VSWR:	1.2 max.

Mechanical

Interface:	WR-284 (BJ32)
Flange:	FDP32
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint

How To Order

QWT284-3K-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:


2 - FDP32 (Outline A)

Examples:

To order a high power waveguide termination, WR-284, 3KW, Aluminum, FDP32, specify QWT284-3K-A-2.

Customization is available upon request.

Outline Drawings

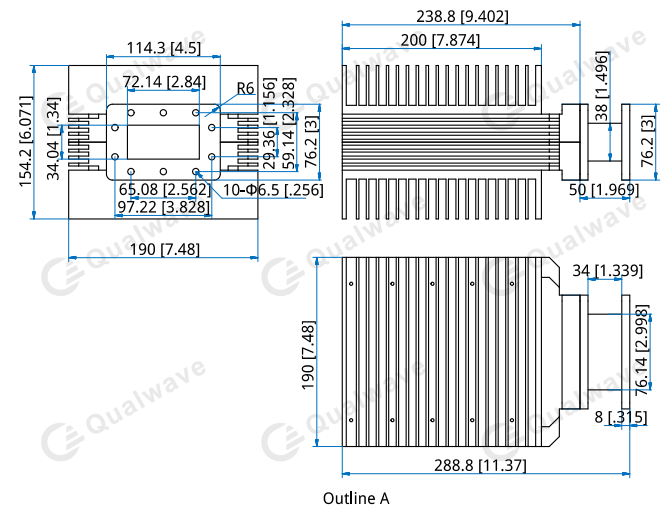

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]