

## QWT284-5K WR-284, 5KW

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching




### Electrical

Frequency: 2.7~3.1GHz  
Average Power: 5KW  
VSWR: 1.2 max.

### Mechanical

Waveguide Size: WR-284 (BJ32)  
Flange: FDP32  
Material: Aluminium  
Finish: Conductive oxidation  
Coating: Black paint

### Outline Drawings

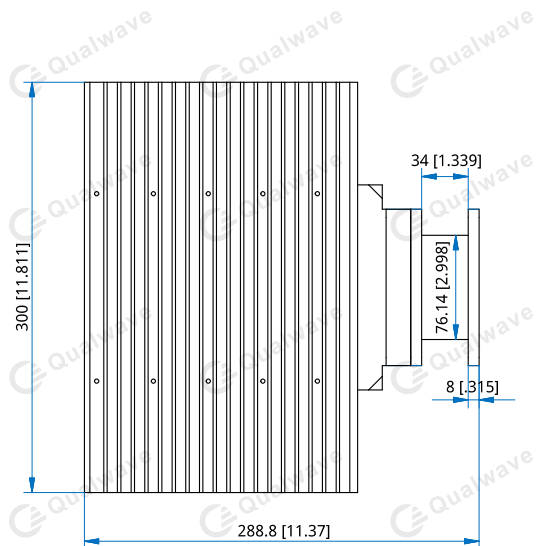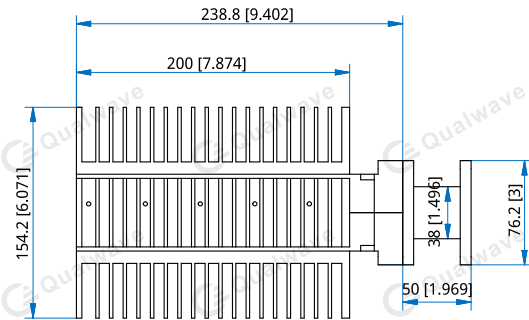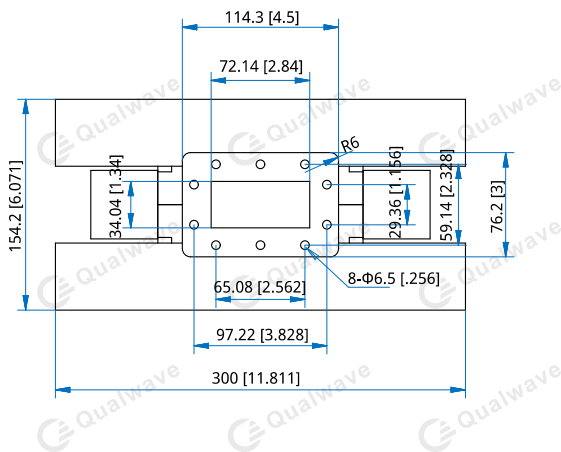

Outline A

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

## How To Order

**QWT284-5K-Y-Z**

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

2 - FDP32 (Outline A)

Examples:

To order a high power waveguide termination, WR-284, 5KW, Aluminum, FDP32, specify QWT284-5K-A-2.

Customization is available upon request.