

QWT34-1K WR-34, 1000W

Features:
* Low VSWR
* Broadband

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 21.7~33GHz
Average Power: 1000W
VSWR: 1.2 max.

Mechanical

Interface: WR-34 (BJ260)
Flange: FBP260
Material: Aluminium
Finish: Conductive oxidation
Coating: Gray paint

How To Order

QWT34-1K-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:


1 - FBP260 (Outline A)

Examples:

To order a high power waveguide termination, WR-34, 1KW, Aluminum, FBP260, specify QWT34-1K-A-1.

Customization is available upon request.

Outline Drawings

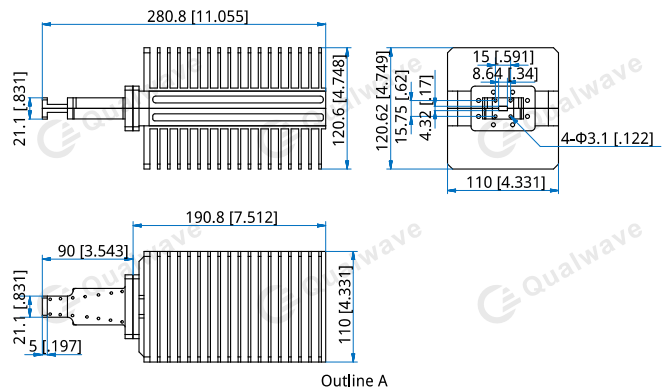

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]