

## QWT340-1K WR-340, 1000W

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching

### Electrical

Frequency: 2.17~3.3GHz  
Average Power: 1000W max.  
VSWR: 1.25 max.


### Mechanical

Waveguide Size: WR-340 (BJ26)  
Flange: FDP26  
Material: Aluminium

### Environmental

Temperature: 0~+30°C

### Outline Drawings

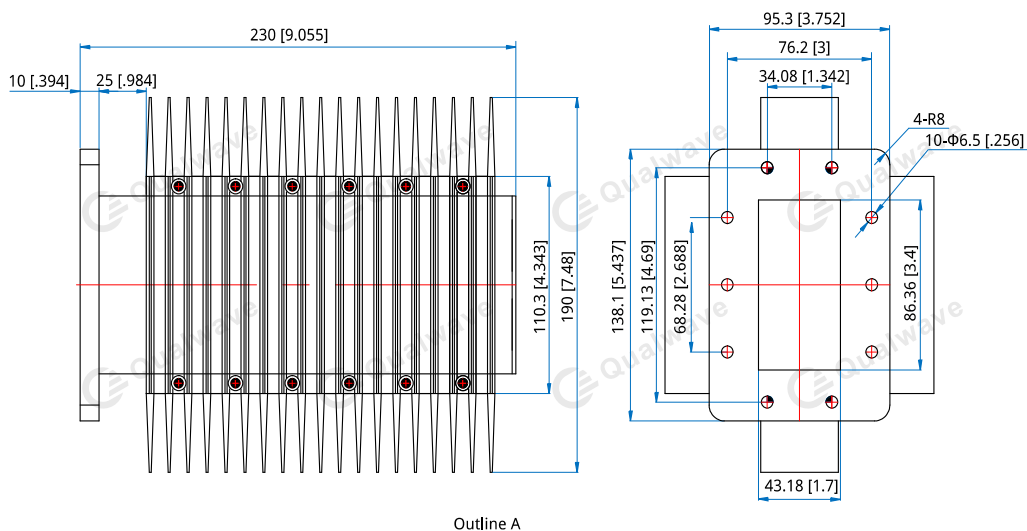

Outline A

Unit: mm [in]  
Tolerance:  $\pm 0.5\text{mm}$  [ $\pm 0.02\text{in}$ ]

### How To Order

**QWT340-1K-Y-Z**

Y: Material  
Z: Flange type

Material naming rules:  
A - Aluminium (Outline A)

Flange naming rules:

2 - FDP26 (Outline A)

Examples:

To order a high power waveguide termination, WR-340, 1000W, Aluminium, FDP26, specify QWT340-1K-A-2.

Customization is available upon request.