

QLAS-40000-60000-35-70

40~60GHz, 35dB, 7dB

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	40~60GHz
Gain:	35dB typ.
Gain Flatness:	±2.5dB typ.
Output Power (P1dB):	20dBm typ.
Noise Figure:	7dB typ.
Spurious:	-60dBc max.
Harmonic:	-15dBc typ.
VSWR:	2 typ.
Voltage:	220V AC
Impedance:	50Ω

Mechanical

Size*1: 136*186*52mm
 5.354*7.323*2.047in

RF Connectors: 1.85mm Female

[1] Exclude connectors, rack mount brackets, handles.

How To Order


QLAS-40000-60000-35-70

Customization is available upon request.

Environmental

Operating Temperature: -20~+50°C
 Non-operating Temperature: -55~+85°C

Outline Drawings

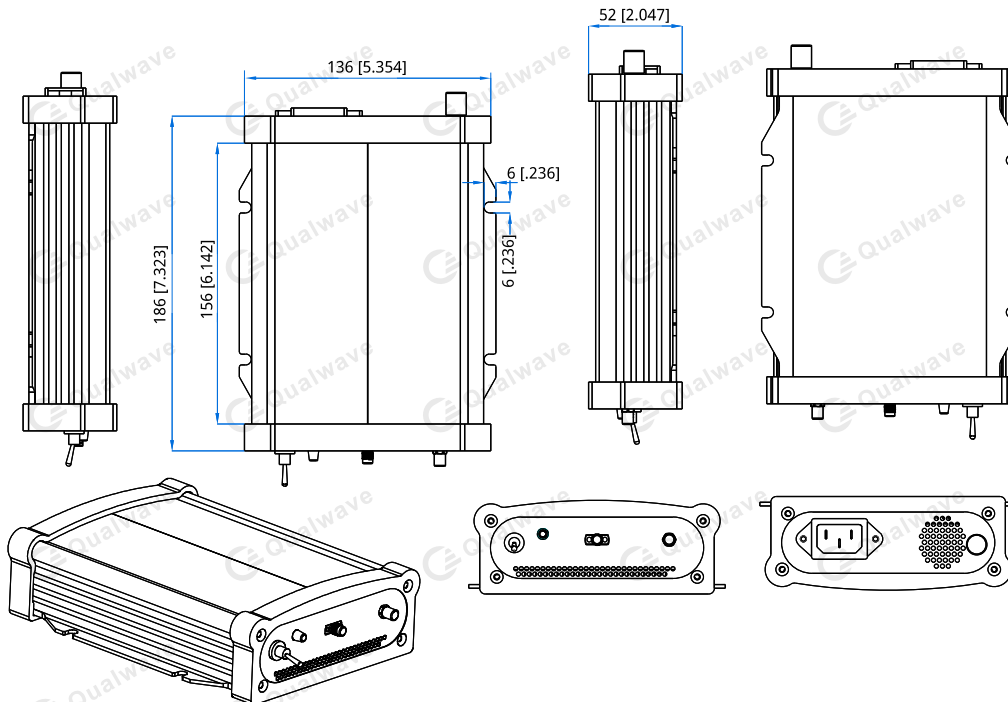

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]