

QLF-1000-70

DC~1GHz, 70dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~1GHz
Insertion Loss:	1dB max. @DC~0.9GHz 1.5dB max. @0.9~1GHz
VSWR:	1.3 max.
Stop Band Attenuation:	70dB@1.3~4.2GHz min.
Average Power:	15W max.
Impedance:	50Ω

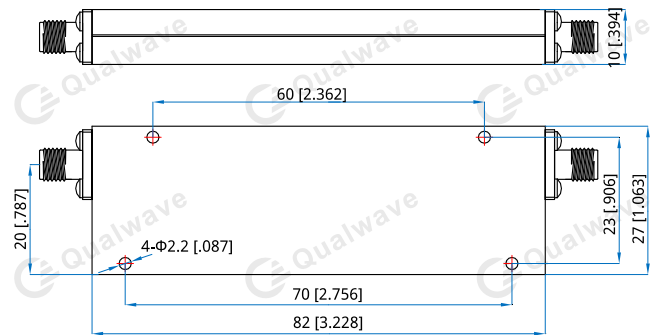
Mechanical

Size ^{*1} :	82*27*10mm 3.228*1.063*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QLF-1000-70

Customization is available upon request.