

## QLF-300-40

DC~0.3GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	DC~0.3GHz
Stop Band Attenuation:	40dB@450MHz min. 60dB@600MHz min.
Insertion Loss:	1dB max.
VSWR:	1.5 max.
Power:	10W min.

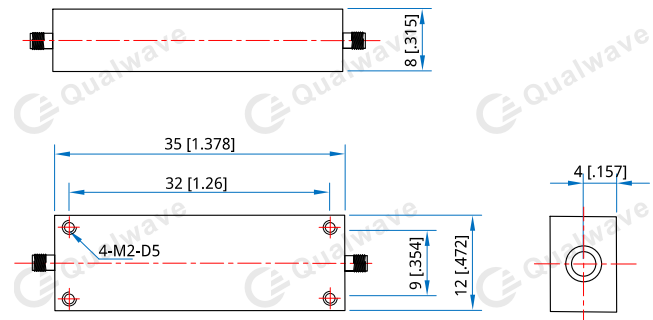
**Mechanical**

Size <sup>*1</sup> :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA female
Mounting:	4-M2, depth 5mm

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QLF-300-40**

Customization is available upon request.