

QCA10-0.5-4-15

0.5~4GHz, 0~15dB, 10W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~4GHz
VSWR:	1.5 max.
Attenuation Range:	15dB
Insertion Loss:	0.5dB max.
Impedance:	50Ω
Average Power:	10W

Mechanical


Size ^{*1} :	148*72*19mm 5.827*2.835*0.748in
Weight:	590g
RF Connectors:	N Female
Outer Conductor:	Nickel plated brass
Female Inner Conductor:	Gold plated beryllium copper
Housing:	Aluminum

[1] Exclude connectors.

Environmental

Temperature:	-40~+65°C
--------------	-----------

Outline Drawings

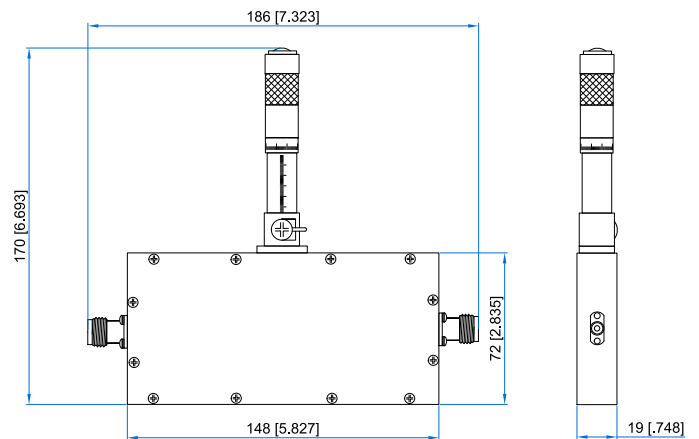

Unit: mm [in]

Tolerance: ±1mm [±0.04in]

How To Order

QCA10-0.5-4-15

Customization is available upon request.