

## QWT112-K15 WR-112, 150W

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching

### Electrical

Frequency: 6.57~10GHz  
Average Power: 150W  
VSWR: 1.2 max.




### Mechanical

Waveguide Size: WR-112 (BJ84)  
Flange: FBP84

### Environmental

Temperature: -55~+125°C

### Outline Drawings

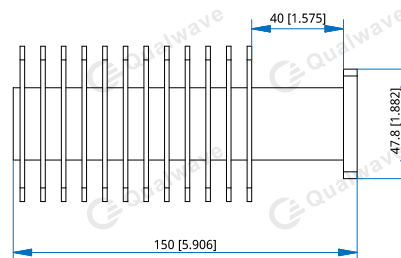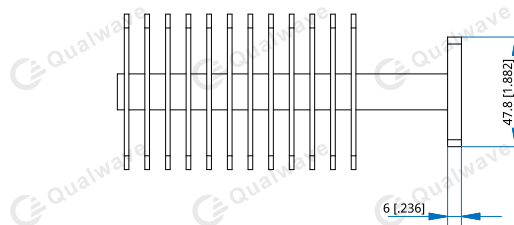

Outline A

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**QWT112-K15-Y-Z**

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

1 - FBP84 (Outline A)

Examples:

To order a medium power waveguide termination, WR-112, 150W, Aluminum, FBP84, specify QWT112-K15-A-1.

Customization is available upon request.