

## QWT28-K5 WR-28, 500W

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching


### Electrical

Frequency: 26.3–40GHz  
Average Power: 500W min.  
VSWR: 1.15 max.

### Mechanical

Waveguide Size: WR-28 (BJ320)  
Flange: FBP320  
Material: Aluminium  
Finish: Conductive oxidation  
Coating: Black paint

### Outline Drawings

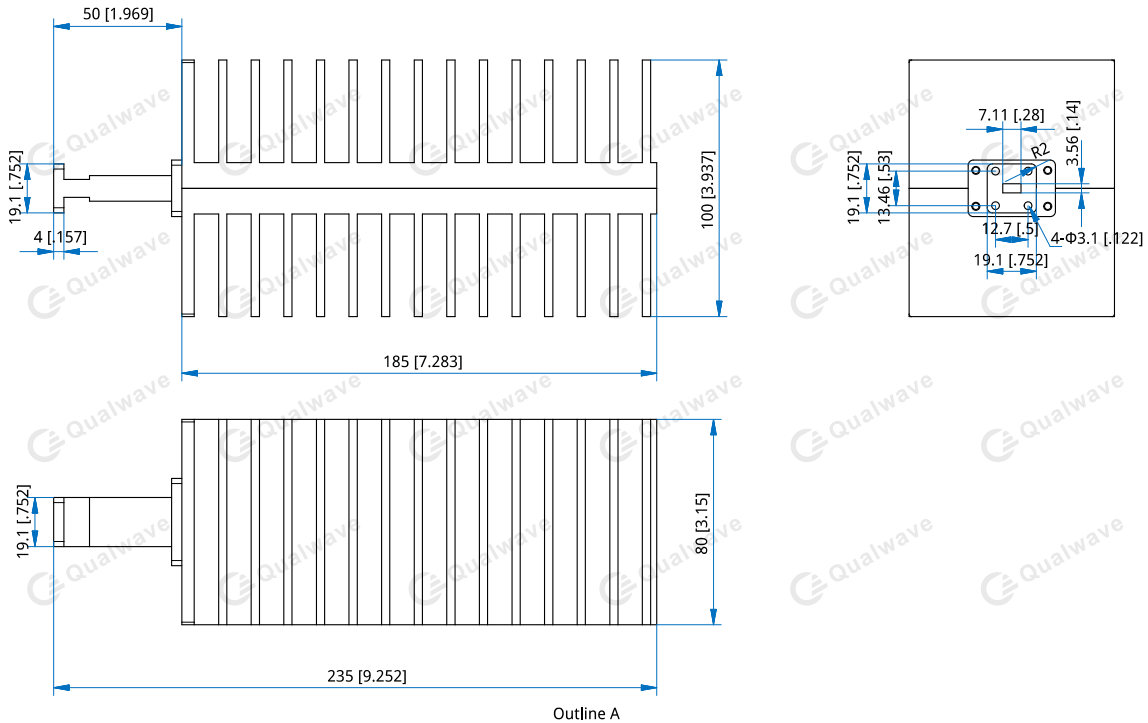

Unit: mm [in]  
Tolerance:  $\pm 0.5\text{mm}$  [ $\pm 0.02\text{in}$ ]

### How To Order

**QWT28-K5-Y-Z**

Y: Material  
Z: Flange type

Material naming rules:  
A - Aluminum (Outline A)

Flange naming rules:

1 - FBP320 (Outline A)

Examples:

To order a medium power waveguide termination, WR-28, 500W, Aluminum, FBP320, specify QWT28-K5-A-1.

Customization is available upon request.