Qualwave

Medium Power Waveguide Termination

QWT90-K2

WR-90, 200W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency:	8.2~12.5GHz
VSWR:	1.2 max.
Average Power:	200W

Mechanical

Waveguide Size:	WR-90 (BJ100)
Flange:	FBP100
Material:	Aluminium

Outline Drawings

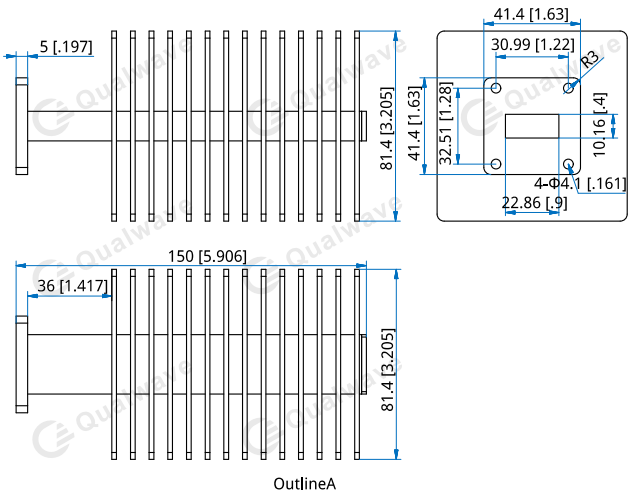

OutlineA

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QWT90-K2-Y-Z

Y : Material
Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:
1 - FBP100 (Outline A)

Examples:
To order a low power waveguide termination, WR-90, 200W, Aluminum, FBP100, specify QWT90-K2-A-1.

Customization is available upon request.