

QBMTK15

150W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching

Electrical

Frequency Range:	30~500MHz, 500~800MHz, 800~2200MHz
Average Power*1:	150W@25°C
VSWR:	1~6 (±7%)
Peak Power:	5KW (5μS pulse width, 3% duty cycle)

[1] Derated linearly to 10W@125°C.

Mechanical

Connector:	N, SMA
Weight:	1.45Kg
Housing:	Aluminum
Outer Conductor:	Nickel plated brass
Male Inner Conductor:	Gold plated brass
Female Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature: -55~+125°C

How To Order

[QBMTK15-30-500-Y-Z-V](#)

[QBMTK15-500-800-Y-Z-V](#)

[QBMTK15-800-2200-Y-Z-V](#)

Y: VSWR (1~6)

Z: Connector type

V: Outline Drawings

Connector type naming rules:

N - N male (Outline A, B)

S - SMA male

Outline Drawings naming rules:

A - 153*76*76mm (Outline A)


B - 155*130*75mm (Outline B)

Examples:


To order a termination, 30~500MHz,VSWR 1.5, N male,
 153*76*76mm, specify QBMTK15-30-500-1.5-N-A.

Customization is available upon request.

Outline Drawings

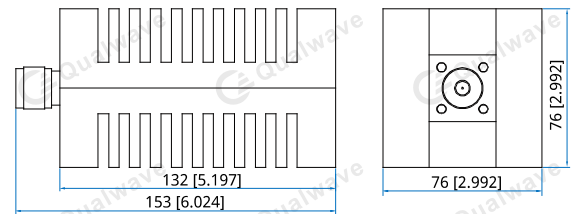

Outline A

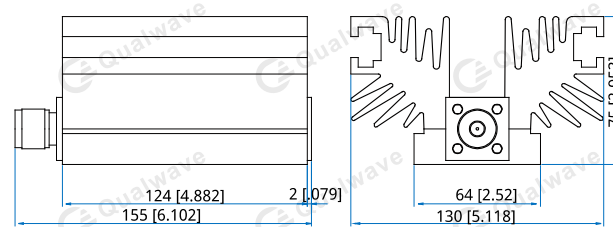

Outline B

Unit: mm [in]

Tolerance: ±3%