



QC-8-FA-086-1

DC~40GHz, Female, Panel Mount

Features: Applications: * Low VSWR * Wireless * Radar

* Instruments

* Electronics



Electrical

 $\begin{array}{ll} \mbox{Frequency:} & \mbox{DC\sim40GHz} \\ \mbox{Impedance:} & \mbox{50} \mbox{\Omega} \\ \mbox{VSWR:} & 1.25 \mbox{ typ.} \end{array}$

Mechanical

Mating Cable: QA220, QH280, QK086, QF086,

QE086, QD086

Mating Cable Connector: QC-8-MA-086-1

Conductor: Black anodizing of aluminum

Connector Gender: Female

Mounting Type: Panel mount

Environmental


Temperature: -40~+125°C

How To Order

QC-8-FA-086-1

Customization is available upon request.

Outline Drawings

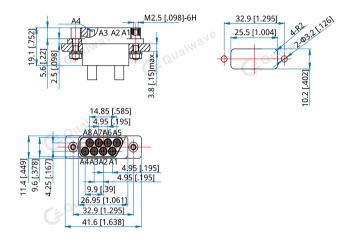

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]