

QC-8-MB-02

DC~67GHz, GPPO Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~67GHz
Impedance: 50Ω
VSWR: 1.5 max.

Mechanical

Matching Cable connector: QC-8-FB-A220-1
Outer Conductor: Gold plated brass
Dielectric: PEEK
Inner Conductor: Gold plated beryllium copper
Connector*1: GPPO male

[1] Mateable with SSMP, SMPM & Mini-SMP.

Environmental


Temperature: -55~+125°C

How To Order

QC-8-MB-02

Customization is available upon request.

Outline Drawings

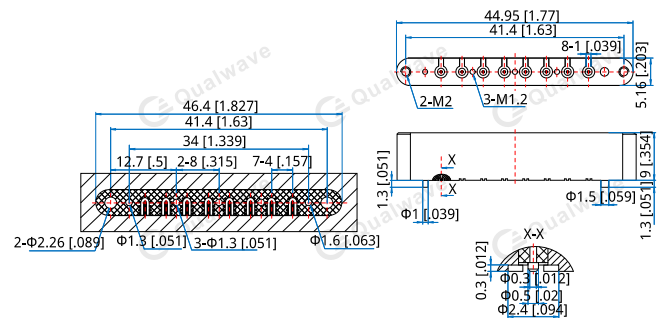

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]