

QMP2-0-1000-1

DC~0.15GHz, 0.18~1GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	DC~0.15GHz
Channel 2 (H):	0.18~1GHz
Passband Insertion Loss:	2.0dB max.
Rejection (CH L):	60dBc min. @0.18~1GHz
Rejection (CH H):	60dBc min. @DC~0.15GHz
VSWR:	1.6 max.
Input Power:	0.1W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	35*24*10mm 1.378*0.945*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

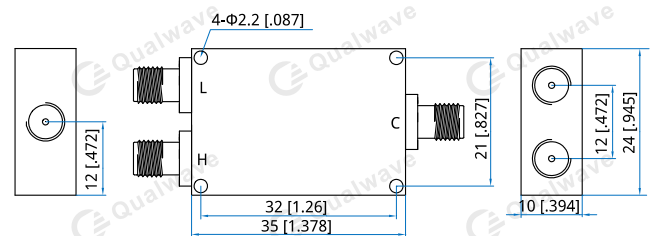

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QMP2-0-1000-1

Customization is available upon request.