

QMP2-0-8000-1

DC~1GHz, 2~8GHz

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Transceivers
 * Instrumentation

Electrical

| | |
|--------------------------|--------------------|
| Channel 1 (L): | DC~1GHz |
| Channel 2 (H): | 2~8GHz |
| Passband Insertion Loss: | 1.5dB max. |
| Rejection (CH L): | 50dB min. @2~8GHz |
| Rejection (CH H): | 50dB min. @DC~1GHz |
| VSWR: | 2 max. |
| Input Power: | 10W |
| Impedance: | 50Ω |

Mechanical


| | |
|----------------------|----------------------------------|
| Size ^{*1} : | 95*50*10mm 3.74*1.969*0.394in |
| RF Connectors: | SMA Female |
| Mounting: | 4-Φ2.5mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|------------------------|-----------|
| Operating Temperature: | -40~+70°C |
|------------------------|-----------|

Outline Drawings

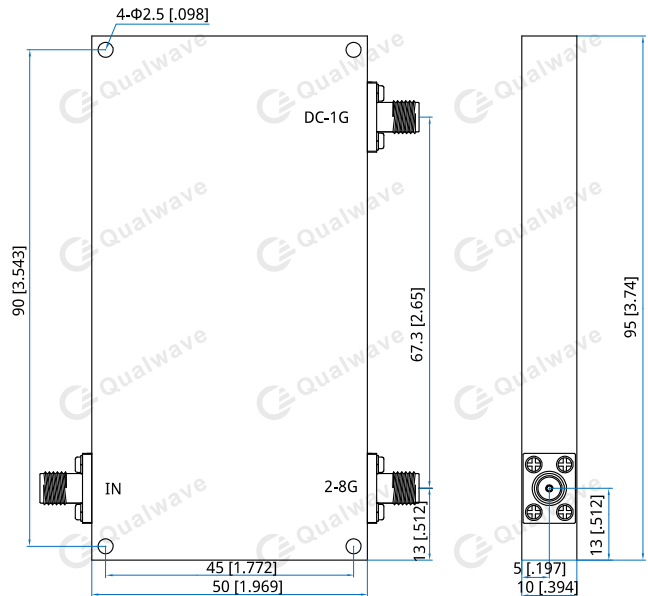

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QMP2-0-8000-1

Customization is available upon request.