

QMP2-10700-15000-1

10.7~12.75GHz, 13.75~15GHz

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Transceivers
 * Instrumentation

Electrical

Channel 1 (L):	10.7~12.75GHz
Channel 2 (H):	13.75~15GHz
Insertion Loss:	1dB max.
Isolation:	50dBc min.
Rejection (CH L):	50dB min. @13.75~18GHz
Rejection (CH H):	50dB min. @DC~12.75GHz
VSWR:	1.45 max.
Input Power:	10W
Impedance:	50Ω

Mechanical


Size ^{*1} :	78*56*12.5mm 3.071*2.205*0.492in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+75°C
------------------------	-----------

Outline Drawings

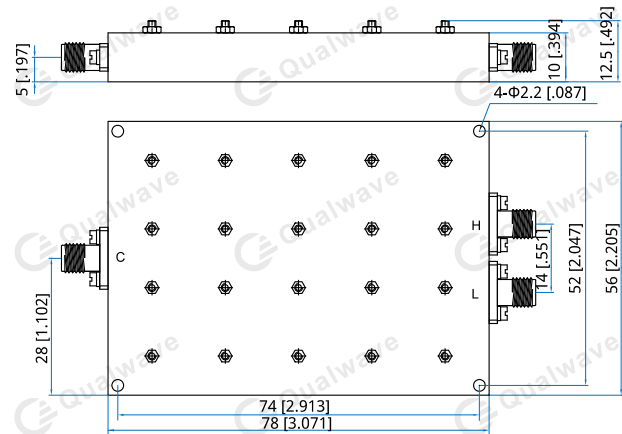

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QMP2-10700-15000-1

Customization is available upon request.