

QMP2-20-6000-1

0.02~1.1GHz, 3~6GHz

Features: * High Stopband Rejection * Small Size	Applications: * Telecom * Laboratory Test * Transceivers * Instrumentation
---	---

Electrical

Channel 1 (L):	0.02~1.1GHz
Channel 2 (H):	3~6GHz
Passband Insertion Loss:	2dB max.
Rejection(CH1):	45dB min. @1.35~6GHz
Rejection(CH2):	45dB min. @DC~2.5GHz
VSWR:	2 max.
Input Power:	1W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	52*62*10mm 2.047*2.441*0.394in
RF Connectors:	SMA Female

[1] Exclude connectors.

Environmental

Operating Temperature: -40~+70°C

Outline Drawings

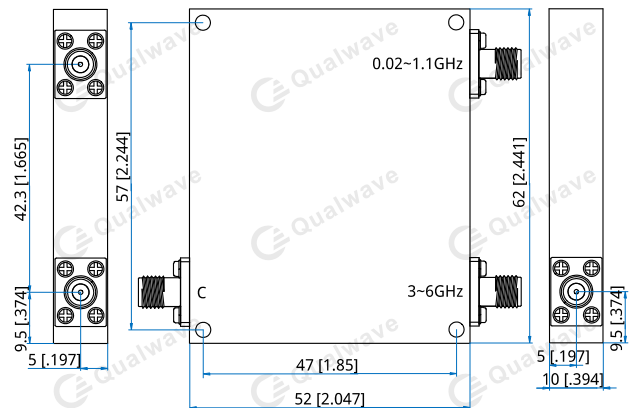

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QMP2-20-6000-1

Customization is available upon request.