

QMP2-500-25000-1

0.5~8.3GHz, 10.3~25GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	0.5~8.3GHz
Channel 2 (H):	10.3~25GHz
Passband Insertion Loss:	2dB max.
Rejection (CH L):	40dB min. @10.3~25GHz
Rejection (CH H):	40dB min. @0.5~8.3GHz
VSWR:	2 max.
Input Power:	5W max.
Impedance:	50Ω

Mechanical

Size ^{*1} :	39*50*10mm 1.535*1.969*0.394in
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.8mm through-hole


[1] Exclude connectors.

Environmental

Operating Temperature:	0~+85°C
------------------------	---------

Outline Drawings

(This picture is for reference only.)

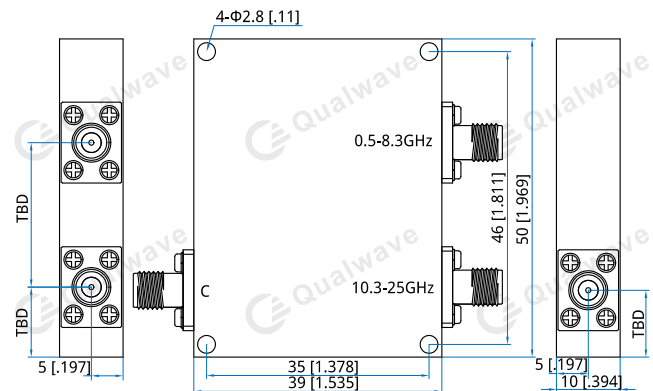

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QMP2-500-25000-1

Customization is available upon request.