

QPDO-E-135-15.66

External Reference, 135MHz, 15.66GHz

Features:

- * High Frequency Stability
- * Ultra Low Phase Noise

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Output Frequency:	15.66GHz
Output Power:	13dBm min.
Spurious:	-75dBc max.
Harmonic:	-25dBc max.
External Reference:	135MHz(-5~+5dBm)
	-155dBc/Hz@1KHz
	-160dBc/Hz@10KHz
	-160dBc/Hz@100KHz
Phase Noise:	-110dBc/Hz@1KHz
	-114dBc/Hz@10KHz
	-114dBc/Hz@100KHz
	-130dBc/Hz@1MHz
Voltage:	+12V DC
Current:	330mA max.
Lock Indicator (LI):	TTL logic
	High: locked
	Low: unlocked

Mechanical


Size ^{*1} :	50.8*47.8*15.7mm
	2*1.882*0.618in
RF Connectors:	SMA Female
	(Field Replaceable)
Power Supply Interface:	Feed Through/Terminal Post
Mounting:	4-M2.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+75°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

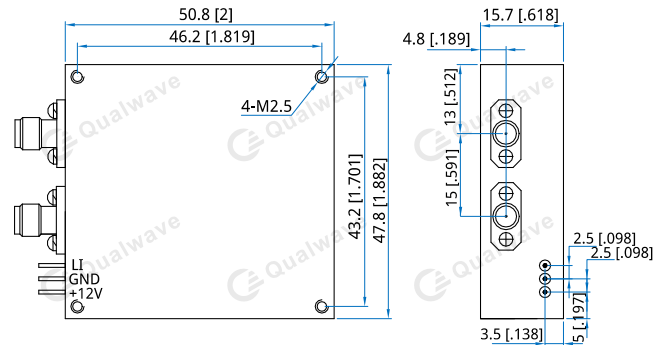

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

QPDO-E-135-15.66

Customization is available upon request.