

## QPVO-E-10-6.95

External Reference, 10MHz, 6.95GHz,

**Features:**

- \* High Frequency Stability
- \* Low Phase Noise

**Applications:**

- \* Wireless
- \* Transceiver
- \* Laboratory Test
- \* Radar

### Electrical

Output Frequency:	6.95GHz
External Reference:	10MHz
	-170dBc/Hz@10KHz
Input Power:	0±2dBm
Output Power:	13dBm min.
Phase Noise:	-80dBc/Hz@1KHz
	-90dBc/Hz@10KHz
Harmonic:	-20dBc max.
Spurious:	-75dBc max.
Voltage:	+12V DC
Current:	500mA max.
Lock Indicator (LI):	TTL logic
	High: locked
	Low: unlocked

### Mechanical


Size*1:	57.2*57.2*16mm
	2.252*2.252*0.63in
RF Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+75°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

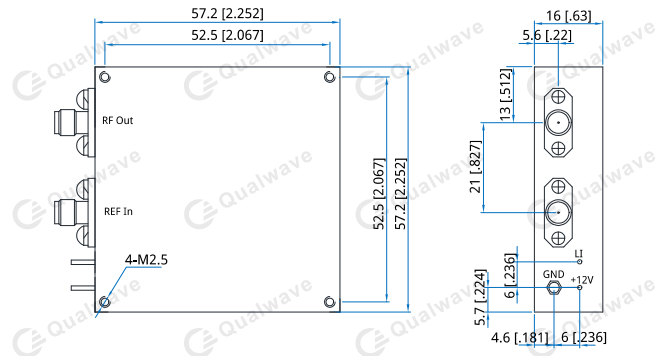

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QPVO-E-10-6.95**

Customization is available upon request.