

QPA-30-512-52-52S

30~512MHz, 52dB, 52dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	30~512MHz
Gain:	52dB
Gain Flatness:	±2dB
Input VSWR:	2 max.
Output Power (Psat):	52dBm
Input Power:	3dBm
IMD3:	-30dBc min.
2 th Harmonic:	-10dBc min.
Voltage:	+28V
Current:	13A max.
Impedance:	50Ω

Mechanical


Size*1:	181.07*78.92*26.2mm 7.129*3.107*1.031in
RF In Connectors:	SMA Female
RF Out Connectors:	N Female
Mounting:	4-Φ3.2mm through-hole
Power Supply Interface:	Feed Through/Terminal Post

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
------------------------	-----------

Outline Drawings

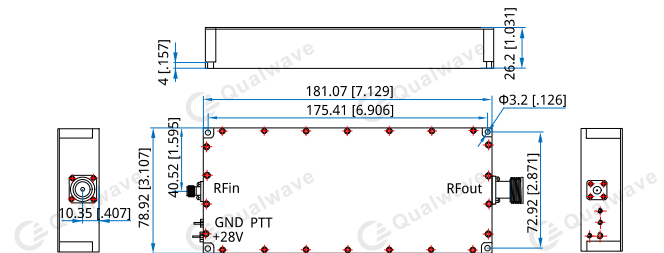

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPA-30-512-52-52S

Customization is available upon request.