

QPW284
WR-284

Features:
* Low VSWR

* Low VSWR

Applications:

- * Wireless
- * Radar
- * Instruments
- * Electronics

Electrical

Frequency:	2.6~3.95GHz
VSWR:	1.2 max.
Insertion Loss:	0.3dB max.
Withstand Air Pressure:	0.2MPA max.

Mechanical

Waveguide Size:	WR-284 (BJ32)
Flange:	FDP32/FDM32
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint

How To Order

QPW284-X-Y

X: Material

Y: Flange type

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:


2-4 - FDP32-FDM32 (Outline A)

Examples:

To order a Pressure Window, WR-284, Aluminium, FDP32/FDM32, specify QPW284-A-2-4.

Customization is available upon request.

Outline Drawings

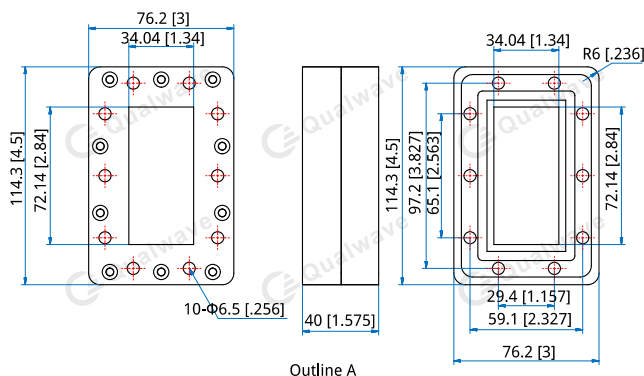

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]