

QPW51 WR-51

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	14.5–22GHz
VSWR:	1.35 max.
Insertion Loss:	0.6dB max.
Withstand Air Pressure:	0.1MPa max.

Mechanical

Waveguide Size:	WR-51 (BJ180)
Flange:	FBP180
Material:	Copper
Finish:	Pickling passivation

How To Order

QPW51-X-Y

X: Material

Y: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:


1 - FBP180 (Outline A)

Examples:

To order a Pressure Window, WR-51, Copper, FBP180, specify QPW51-C-1.

Customization is available upon request.

Outline Drawings

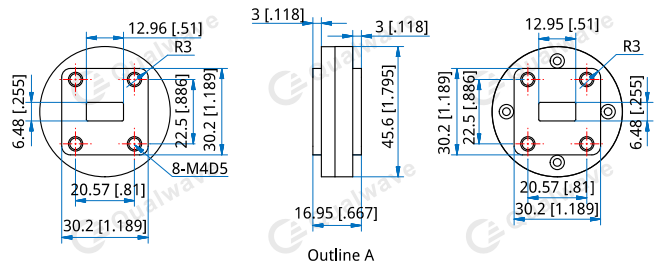

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]