

QCM-FB-B95-01

MCX Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~6GHz
VSWR: 1.35 max.
Impedance of Dielectric: 1000MΩ min.
Voltage Withstand: 750V RMS min.
Impedance: 50Ω


Mechanical

RF Connector: MCX Female
Mating Life Cycle: 500 cycles
Outer Conductor: Gold plated brass
Dielectric: PTFE
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -65~+165°C

Outline Drawings

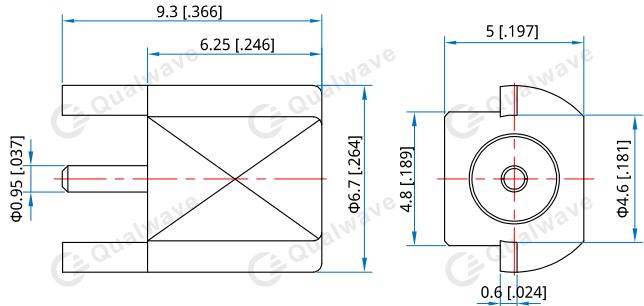

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

[QCM-FB-B95-01](#)

Customization is available upon request.