

QRC16-2420-2480-10K-3407

16-Way, 2.42~2.48GHz, 10KW

Features:

- * Small Size
- * Low Insertion Loss
- * High Reliability

Applications:


- * Radar System
- * Communication System
- * Power Amplifier System
- * Test System

Electrical

Frequency:	2.42~2.48GHz
Insertion Loss ^{*1} :	0.5dB max. (average)
VSWR (SUM Port):	1.3 max.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	10KW as combiner

[1] Excluding theoretical loss 12dB.

Outline Drawings

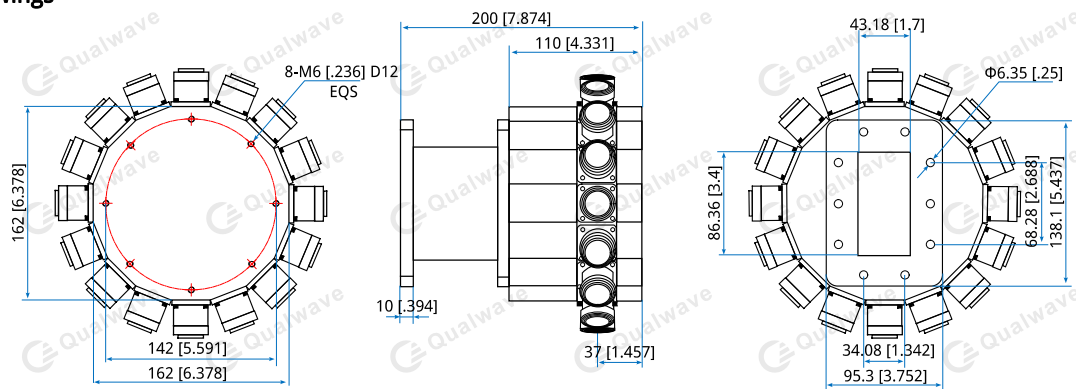

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Mechanical

Connectors: WR-340 (BJ26), 7/16 DIN (L29) Female

How To Order

QRC16-2420-2480-10K-3407

Customization is available upon request.