

## QRJ1-3000-06-1

Single Channel, DC~3GHz, 6.6mm

**Features:**

- \* Low VSWR
- \* Low VSWR Flatness
- \* Low Insertion Loss Flatness

**Applications:**

- \* High Speed Digital Signal Transmission
- \* Analog Signal Transmission

### Electrical

Frequency:	DC~3GHz
VSWR:	1.3 max.
VSWR Flatness:	0.05 max.
Insertion Loss:	0.3dB
Impedance:	75Ω


### Mechanical

Connectors:	RG179
Rotating Speed:	100RPM
Operation Life:	5M Cycles
IP Grade:	IP51

### Environmental

Operating Temperature:	-30~+80°C
Operating Humidity:	0~85%

### Outline Drawings

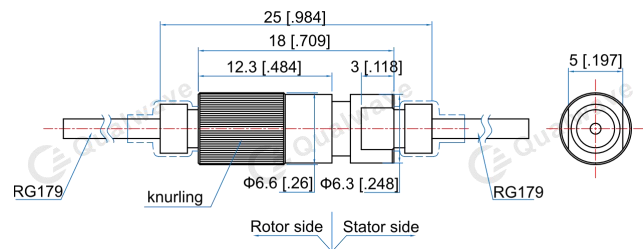

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QRJ1-3000-06-1**

Customization is available upon request.