

QRJ1-3000-06

Single Channel, DC~3GHz, 6.6mm

Features:

- * Low VSWR
- * Low VSWR Flatness
- * Low Insertion Loss Flatness

Applications:

- * High Speed Digital Signal Transmission
- * Analog Signal Transmission

Electrical

Frequency:	DC~3GHz
VSWR:	1.3 max.
VSWR Flatness:	0.05 max.
Insertion Loss:	0.3dB
Impedance:	50Ω


Mechanical

Connectors:	RG316
Rotating Speed:	100RPM
Operation Life:	5M Cycles
IP Grade:	IP51

Environmental

Operating Temperature:	-30~+80°C
Operating Humidity:	0~85%

Outline Drawings

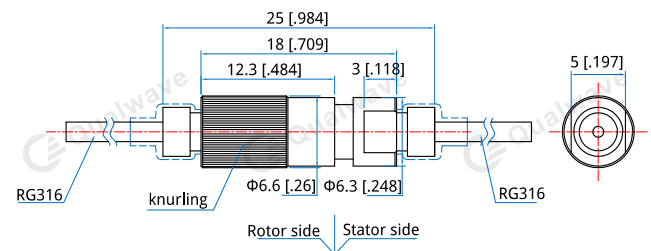

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QRJ1-3000-06

Customization is available upon request.